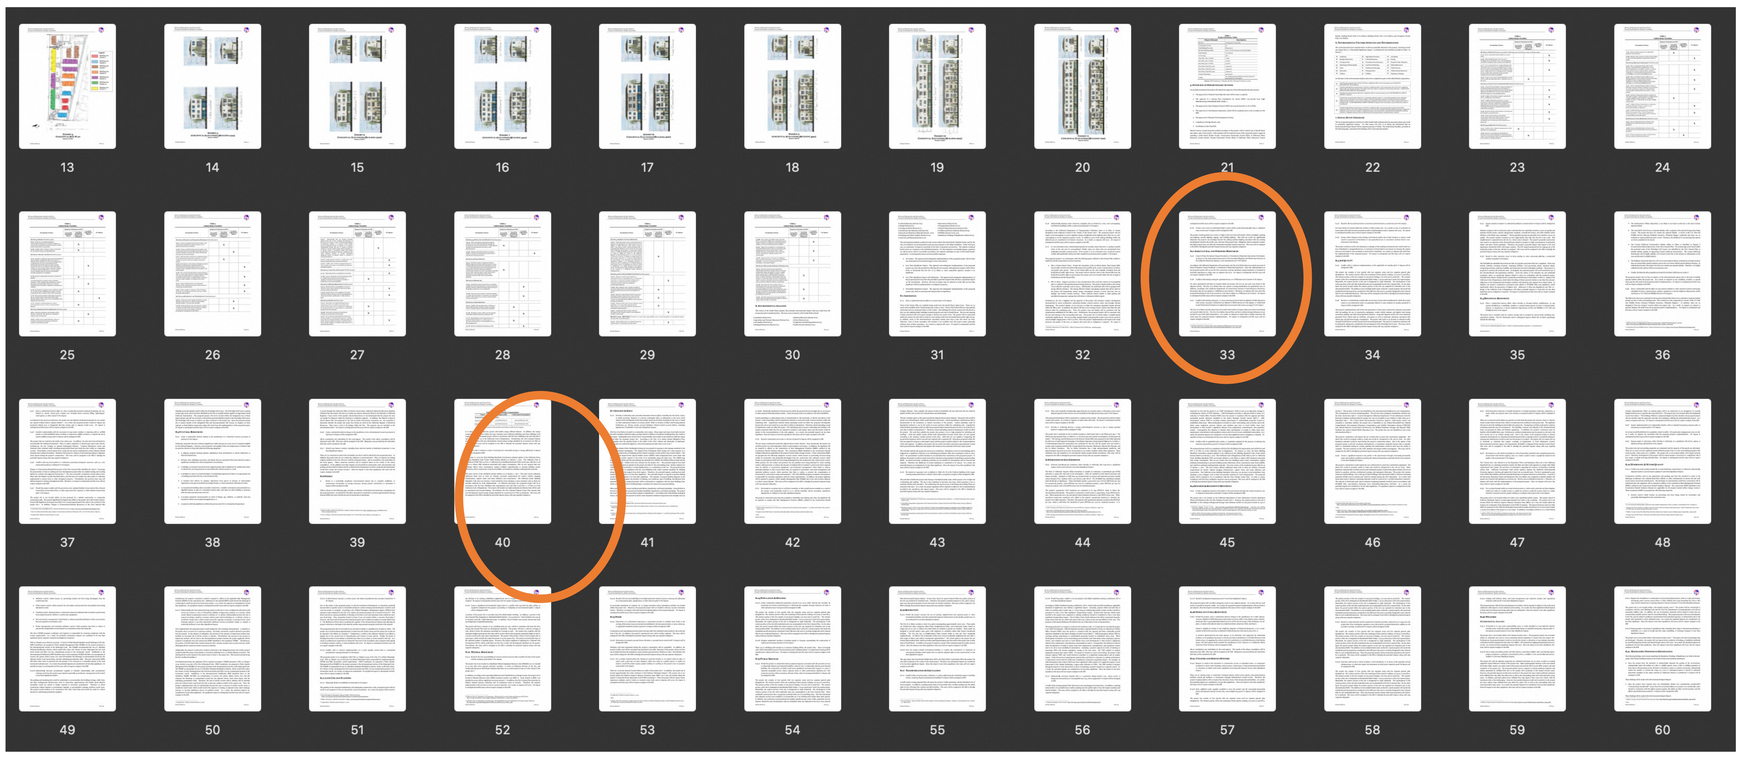

Document Thumbnail

P21

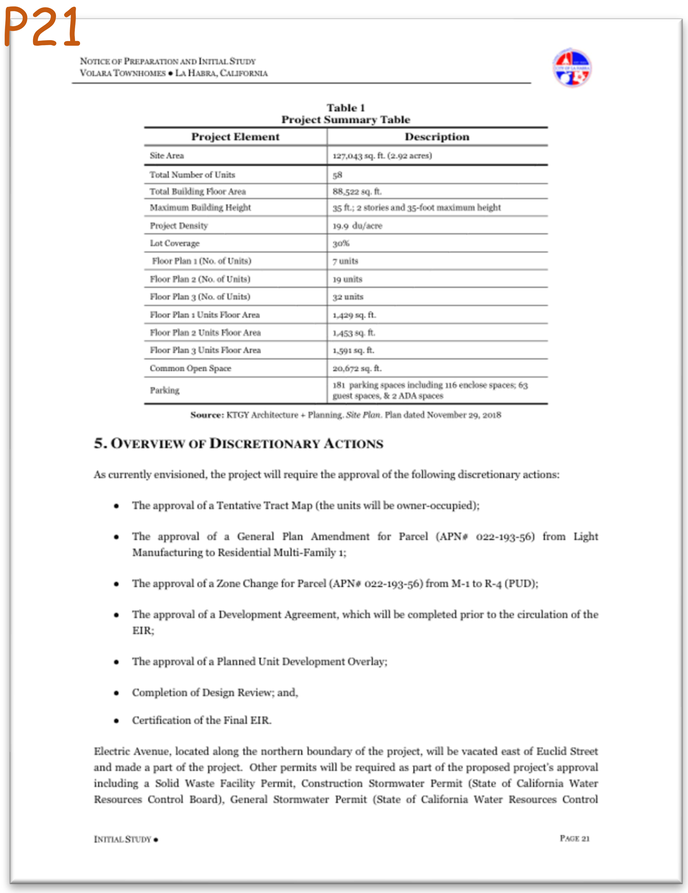

NOTICE OF PREPARATION AND INITIAL STUDY
VOLARA TOWNHOMES • LA HABRA, CALIFORNIA

Table 1
Project Summary Table

Project Element	Description
Site Area	127,043 sq. ft. (2.92 acres)
Total Number of Units	58
Total Building Floor Area	88,522 sq. ft.
Maximum Building Height	35 ft.; 2 stories and 35-foot maximum height
Project Density	19.9 du/acre
Lot Coverage	30%
Floor Plan 1 (No. of Units)	7 units
Floor Plan 2 (No. of Units)	19 units
Floor Plan 3 (No. of Units)	32 units
Floor Plan 1 Units Floor Area	1,429 sq. ft.
Floor Plan 2 Units Floor Area	1,453 sq. ft.
Floor Plan 3 Units Floor Area	1,591 sq. ft.
Common Open Space	20,672 sq. ft.
Parking	181 parking spaces including 116 enclose spaces; 63 guest spaces, & 2 ADA spaces

Source: KTGY Architecture + Planning. *Site Plan*. Plan dated November 29, 2018

5. OVERVIEW OF DISCRETIONARY ACTIONS

As currently envisioned, the project will require the approval of the following discretionary actions:

- The approval of a Tentative Tract Map (the units will be owner-occupied);
- The approval of a General Plan Amendment for Parcel (APN# 022-193-56) from Light Manufacturing to Residential Multi-Family 1;
- The approval of a Zone Change for Parcel (APN# 022-193-56) from M-1 to R-4 (PUD);
- The approval of a Development Agreement, which will be completed prior to the circulation of the EIR;
- The approval of a Planned Unit Development Overlay;
- Completion of Design Review; and,
- Certification of the Final EIR.

Electric Avenue, located along the northern boundary of the project, will be vacated east of Euclid Street and made a part of the project. Other permits will be required as part of the proposed project's approval including a Solid Waste Facility Permit, Construction Stormwater Permit (State of California Water Resources Control Board), General Stormwater Permit (State of California Water Resources Control

P40

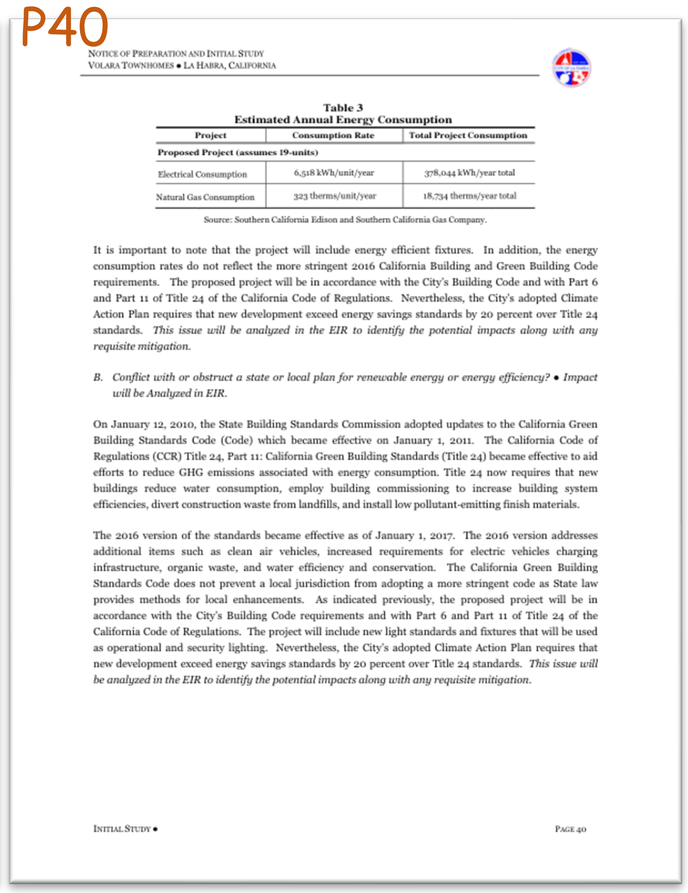

NOTICE OF PREPARATION AND INITIAL STUDY
VOLARA TOWNHOMES • LA HABRA, CALIFORNIA

Table 3
Estimated Annual Energy Consumption

Project	Consumption Rate	Total Project Consumption
Proposed Project (assumes 19-units)		
Electrical Consumption	6,518 kWh/unit/year	378,044 kWh/year total
Natural Gas Consumption	323 therms/unit/year	18,734 therms/year total

Source: Southern California Edison and Southern California Gas Company.

It is important to note that the project will include energy efficient fixtures. In addition, the energy consumption rates do not reflect the more stringent 2016 California Building and Green Building Code requirements. The proposed project will be in accordance with the City's Building Code and with Part 6 and Part 11 of Title 24 of the California Code of Regulations. Nevertheless, the City's adopted Climate Action Plan requires that new development exceed energy savings standards by 20 percent over Title 24 standards. *This issue will be analyzed in the EIR to identify the potential impacts along with any requisite mitigation.*

B. Conflict with or obstruct a state or local plan for renewable energy or energy efficiency? • Impact will be Analyzed in EIR.

On January 12, 2010, the State Building Standards Commission adopted updates to the California Green Building Standards Code (Code) which became effective on January 1, 2011. The California Code of Regulations (CCR) Title 24, Part 11: California Green Building Standards (Title 24) became effective to aid efforts to reduce GHG emissions associated with energy consumption. Title 24 now requires that new buildings reduce water consumption, employ building commissioning to increase building system efficiencies, divert construction waste from landfills, and install low pollutant-emitting finish materials.

The 2016 version of the standards became effective as of January 1, 2017. The 2016 version addresses additional items such as clean air vehicles, increased requirements for electric vehicles charging infrastructure, organic waste, and water efficiency and conservation. The California Green Building Standards Code does not prevent a local jurisdiction from adopting a more stringent code as State law provides methods for local enhancements. As indicated previously, the proposed project will be in accordance with the City's Building Code requirements and with Part 6 and Part 11 of Title 24 of the California Code of Regulations. The project will include new light standards and fixtures that will be used as operational and security lighting. Nevertheless, the City's adopted Climate Action Plan requires that new development exceed energy savings standards by 20 percent over Title 24 standards. *This issue will be analyzed in the EIR to identify the potential impacts along with any requisite mitigation.*

Evidence page

Question: Which tables provide detailed information on the project's design and specifications?
Select table names from the doc that best answer the question, do not alter or analyze the table names themselves.
Detailed Evidence Description:

1. **Project Specifications and Design (Table 1)**: This table provides a detailed overview of the project elements, including the site area, total number of units, building floor area, maximum building height, project density, lot coverage, floor plans, common open space, and parking. xxx
2. **Initial Study Checklist (Table 2)**: These tables provide a comprehensive checklist for evaluating the potential environmental impacts of the project. Each section addresses specific issues such as aesthetics xxx
3. **Energy Consumption (Table 3)**: This table outlines the projected energy consumption for the proposed project, assuming 19 units. It details the electrical xxx

…

Ground Truth: [“Table 1 Project Summary Table",
“Table 3 Estimated Annual Energy Consumption"]
Task: Locating(cross-table)
Evidence Pages: [21, 40]
Evidence Sources: ["Layout(table name)”, ”Table"]
Answer Format: List